



10 / 537633  
PCT/EP200 3 / 050868

01.12.2003



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales NP10 8QQ  
03 JUN 2005

REC'D 11 FEB 2004

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**PRIORITY  
DOCUMENT**


SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Signed

*Stephen Hordley*

Dated

28 October 2003



The  
Patent  
Office

1/77

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference **SC12418EM/DJM/GB/JB/TEMPLE (O/S)**
2. Patent application number **0228144.2** **03 DEC 2002**  
(The Patent Office will fill in this part)
3. Full name, address and postcode of the or of each applicant (underline all surnames) **MOTOROLA, INC** **03DEC02 E768104-1 002319**  
**1303 EAST ALGONQUIN ROAD,**  
**SCHAUMBURG, ILLINOIS 60196,**  
**U.S.A.** **P01/7700 0.00-0228144.2**  
Patents ADP number (if you know it) **08281107001**  
If the applicant is a corporate body, give the country/state of its incorporation **U.S.A.** **DELAWARE**  
*07303423001*
4. Title of the invention **SYSTEM, NODE AND METHOD FOR PROVIDING MEDIA ARBITRATION**
5. Name of your agent (if you have one) **MCCORMACK DEREK J**  
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode) **EUROPEAN INTELLECTUAL PROPERTY DEPARTMENT**  
**MIDPOINT**  
**ALENCON LINK**  
**BASINGSTOKE**  
**HAMPSHIRE RG21 7PL**  
**UK**  
**ADP NO. 00001180006**  
Patents ADP number (if you know it)
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day / month / year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

☒ YES
☐ NO

  - a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
See note (d))

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 15

Claim(s) 3

Abstract 1

Drawing(s) 4 + 4

*Handwritten mark*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 7

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) 1

Any other documents 1 x FEE SHEET  
(please specify)

*Handwritten mark*

11. I/We request the grant of a patent on the basis of this application.

Signature

*Handwritten signature: D. McCormack*

Date

2/12/02

2. Name and daytime telephone number of person to contact in the United Kingdom

MCCORMACK DEREK J

Julia BRAMHALL

01256 790002

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- 1. If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- 2. Write your answers in capital letters using black ink or you may type them.
- 3. If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- 4. If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- 5. Once you have filled in the form you must remember to sign and date it.

For details of the fee and ways to pay please contact the Patent Office.

SYSTEM, NODE AND METHOD FOR PROVIDING MEDIA ARBITRATION

**Field of the Invention**

5

The invention relates to communication protocols for multi-node distributed communication systems, and particularly (though not exclusively) to such protocols for use in automotive applications.

10

**Background of the Invention**

In the field of communication protocols for multi-node wired communication systems in automotive applications, two existing protocols are well known: TTP/C (Time-Triggered communication Protocol for safety-Critical distributed real-time control systems) and byteflight (a protocol for safety-critical applications in automotive vehicles, combining time and priority controlled bus access).

FlexRay, a presently evolving communication protocol, is specified to use a TDMA (Time Division Multiple Access) scheme for the static segment and a FTDMA (Flexible Time-Division, Multiple-Access) arrangement such as byteflight for the dynamic segment. The FlexRay protocol requires that the following Media Access Scheme (MAS) requirements are met:

30

- MAS 1: Under fault-free conditions the media arbitration scheme shall allow for both static (pre-scheduled) and dynamic (run-time determined) media arbitration.
- 5 MAS 2: The arbitration scheme shall be based on a periodically recurring principle.
- MAS 3: The arbitration scheme shall implement a collision avoidance principle (assuming fault-free subscribers).
- 10 MAS 4: The arbitration scheme shall allow large oscillator drifts per subscriber over the lifetime of the system.

Therefore at present there is no known arrangement which  
15 will satisfy all of the MAS requirements of FlexRay.

A need therefore exists for a system, node and method for providing media arbitration wherein the abovementioned disadvantage(s) may be alleviated.

20

#### Statement of Invention

In accordance with a first aspect of the present  
25 invention there is provided a system for providing media arbitration as claimed in claim 1.

In accordance with a second aspect of the present invention there is provided a node as claimed in claim 2.

30

- 3 -

In accordance with a third aspect of the present invention there is provided a method for providing media arbitration as claimed in claim 3.

- 5 Preferably the communication slots include static communication slots. A predetermined number of timeslots are preferably utilised for each static communication slot.
- 10 The communication slots preferably include dynamic communication slots. Preferably a dynamically allocated number of timeslots are utilised for each dynamic communication slot.
- 15 Preferably, during dynamic communication slots in which no frame transmission takes place, the number of dynamically allocated number of timeslots is one timeslot.
- 20 Each dynamic communication slot in which frame transmission takes place is preferably divided into alternating matching and mismatching time slots, the matching time slots being valid transmission slots.
- 25 In this way a system, node and method are provided for media arbitration within a periodically recurring communication pattern. Communication jitter is well defined and dealt with, and large oscillator drifts are substantially compensated for.

### Brief Description of the Drawings

One a system, node and method for providing media arbitration incorporating the present invention will now  
5 be described, by way of example only, with reference to the accompanying drawing(s), in which:

- 10 FIG. 1 shows a composite timing diagram illustrating a timing hierarchy of the present invention;
- FIG. 2 shows a timing diagram illustrating a structure and arbitration of a static segment of the timing hierarchy of FIG. 1;
- 15 FIG. 3 shows a timing diagram illustrating a structure of a dynamic segment of the timing hierarchy of FIG. 1 along with the arbitration principle; and
- 20 FIG. 4 shows a composite timing diagram illustrating the procedure for handling symmetric faults.

### Description of Preferred Embodiment(s)

25

A multi-node wired communications system (not shown) such as a 'brake-by-wire' system in an automobile, comprises a number of nodes, each of which is arranged to send and receive data to and from the other nodes of the system.

30

A node (not shown) of the present invention has access to two time bases of different granularity. A time base of high granularity may be defined in terms of microticks. The microtick defines a time base that is unsynchronised in both phase and frequency among different nodes. The second time base, which is of low granularity, is defined in terms of macroticks. The macrotick defines a timebase that is synchronized in both phase and frequency within a precision  $p$  among all synchronized nodes. The macrotick consists of multiple microticks and satisfies the condition that its duration is greater than the precision  $p$ . A synchronization approach that satisfies this assumption is disclosed, for example for FlexRay, in European Patent EP 22116573.

15

Media arbitration distinguishes between two distinct phases: the initial unsynchronized startup phase and the subsequent synchronized operation phase. The two phases differ as follows:

- 20 - during the initial startup phase the node has no knowledge of the system wide synchronized time, i.e. the macrotick time base is not established.
- during the synchronized operation phase the node has knowledge of the system wide synchronized time, i.e. the macrotick time base is established.

25

During the unsynchronised startup phase media arbitration is not required for one of two reasons. Firstly, the node may be integrating into an already operational cluster, in which case a first transmission does not occur until the node is in synchronized operation phase. Secondly,

30



the cluster may not be operational, in which case no other sender is present, i.e. no arbitration of the media is required.

5 Referring now to FIG. 1, there is shown a composite timing diagram of a timing hierarchy according to the present invention. In order to meet requirement 'MAS 2' (that the arbitration scheme shall be based on a periodically recurring principle), transmission within  
10 the synchronized operation phase occurs within a temporally recurring communication cycle 5.

The communication cycle 5 is in effect a timebase which is shared across all nodes of the system. The timebase  
15 has substantially the same error tolerance in each node.

The communication cycle 5 consists of a communication period (CP) made up of two segments: a static segment 10 and a dynamic segment 50 (during which transmissions may  
20 take place), and an optional traffic-free period, the network idle time (NIT) 7. The static and dynamic segments 10 and 50 respectively satisfy the requirement of MAS1 (the provision of static and dynamic media arbitration).

25

The static segment 10 is subdivided into a number of static slots illustrated in FIG. 1 by static slots 11, 12, 13, 18.

30 Each of the static slots 11, 12, 13, 18 is made up of a set of consecutive time intervals, called minislots. For

---

example, the static slot 11 is made up of a set 20 of minislots, including minislots 21, 22, 23 and 28. Each static slot has the same number (v) of minislots. The minislots define a temporal grid that serves as a basis  
5 for the media arbitration, to be further described below.

Each minislot consists of a set of at least two macroticks. By way of example, minislot 22 comprises a set 30 of macroticks, including macroticks 31 and 32.  
10

Each macrotick comprises a set of microticks. For example, the macrotick 32 comprises the set 40 of microticks.

15 The dynamic segment 50 is subdivided into a number of dynamic slots illustrated in FIG. 1 by dynamic slots 51, 52, 53, 58.

Each of the dynamic slots 51, 52, 53, 58 is made up of a  
20 number of minislots of a set 60 of minislots.

However, unlike the static slots, each of the dynamic slots may be a different length, so may be made up of a different number of minislots. The dynamic slot 51 is  
25 made up of minislots 61 and 62 in this example, but the number of minislots used by each dynamic slot is dynamically allocated in a manner to be further described below.

30 As described above with respect to the static segment 10, each minislot of the dynamic segment 50 consists of a set

---

of at least two macroticks. By way of example, minislot 63 comprises a set 70 of macroticks, including macroticks 71 and 72.

- 5 Each macrotick comprises a set of microticks. For example, the macrotick 71 comprises the set 80 of microticks.

It will be appreciated that the set of microticks 80 are  
10 part of the same timing framework as the set of microticks 40 as are all microticks of the system, and similarly the set of macroticks 30 are part of the same timing framework as the set of macroticks 70 as are all macroticks of the system.

15

All minislots consist of an equal number of macroticks. A dedicated instant within each minislot is called the minislot action point.

The minislot action point coincides with the boundary of  
20 two subsequent macroticks within the minislot.

Arbitration in both segments is performed by means of frame priorities and a slot counting scheme. Unique frame priorities, referred to as frame identifiers starting  
25 with 1 are distributed among the nodes. The frame identifier determines when a frame will be sent within the communication phase. Each node maintains a slot counter that is initialised with 1 at the start of each communication cycle.

30

Referring now to FIG. 2 there is shown the timing structure and the arbitration principle of a static segment such as the static segment 10 of FIG. 1.

5 A unique slot ID ranging from 1 to g (total number of static slots) is assigned to every static slot of the static segment. A first slot 110 has the number n, and a second, consecutive slot 120 has the number n+1. All static communication slots are of equal duration, this  
10 being the chosen integral number of minislots, multiplied by the minislot duration. In the example of FIG. 2, the first slot has 12 minislots, from slot 111 (u) to slot 118 (u+11) and the second slot has 12 minislots, from slot 121 (u+12) to slot 128 (u+23). The duration of a  
15 static slot is chosen such that the static slot always accommodates the transmission of the frame associated with it through the slot ID / frame ID relationship.

Frame transmission occurs if the slot counter equals the  
20 frame identifier of a frame to send. In the example of FIG. 2 the first frame 130 having frame ID n, will be transmitted during the first static slot 110, and the second frame 140 having frame ID n+1, will be transmitted during the second static slot 120.

25 Frame transmission starts at the minislot action point within the first minislot of the respective static slot. Therefore the frame transmission of the first frame 130 starts at the minislot action point of minislot 111 (that  
30 being the transition between microticks 112 and 113 respectively). Similarly the frame transmission of the

---

second frame 140 starts at the minislot action point of minislot 121 (that being the transition between microticks 122 and 123 respectively).

- 5 At the end of every static slot the slot counter is incremented by one. As the advancement of the slot counter occurs independently from whether and from when access to the media takes place, arbitration in the static segment is robust against communication faults in  
10 the sense that any disturbance within a slot will not impact arbitration within unaffected slots.

Referring now also to FIG. 3, there is shown a timing diagram illustrating the structure of a dynamic segment  
15 and associated arbitration principle.

The dynamic segment is subdivided into a number of dynamic communication slots. A first dynamic slot 210 has number  $m$ , a second, consecutive slot 220 has number  $m+1$ .  
20 Similarly third, fourth and fifth slots 230, 240 and 250 have numbers  $m+2$ ,  $m+3$  and  $m+4$  respectively.

Each dynamic slot consists of at least one minislot. The exact number depends on the type of faults for which  
25 collision free recovery should be assured: one minislot for fault-free assumption and two minislots for single transmission related faults.

As with the static scenario described above, frame  
30 transmission occurs if the slot counter equals the frame identifier of a frame to send. Once again frame .

---

transmission starts at the minislot action point within the first minislot of the respective dynamic slot.

However unlike the static case, frame transmission must also end at a minislot action point. If the frame would  
5 not otherwise end at a minislot action point by virtue of its data length, then the transmitter must extend the transmission by producing a busy signal. This prevents premature idle detection by the receivers.

10 At the end of every dynamic slot in which no message transmission or reception occurs, the slot counter is incremented by one, i.e. while a message is being transmitted or received the process of incrementing the slot counter is suspended.

15

By virtue of the procedure all fault-free receivers agree implicitly on the dynamic slot, in which the transmission takes place, i.e. the slot counter of all fault-free receivers matches the slot counter of the fault-free  
20 sender and the frame ID value transmitted in the frame.

In order to handle faults the dynamic slots must each consist of (at least) two minislots. The first minislot may be termed a matching minislot and the second minislot  
25 may be termed a mismatching minislot. Furthermore the minislot action point of the first minislot is called the minislot match action point, the minislot action point of the second minislot is called the minislot mismatch action point. According to the above rules frame  
30 transmission starts at the minislot match action point

---

and ends at a minislot action point (either match or mismatch).

Two types of faults are of interest:

- 5 a) the start of a reception (frame or noise) does not align to a minislot action point, and,
- b) the end of a reception does not align to a minislot action point.

- 10 For the fault a) above, if frame reception starts in the matching minislot (that is a minislot having a matching action point) then the receiver is aligned with the transmitter and no slot correction is required. However if frame reception starts in a mismatching minislot (a
- 15 minislot having a mismatching action point) then the receiver has to adjust its minislot phase relationship to match the transmitter. In order to do this it is necessary to evaluate the frame ID contained in the frame being received, in order to know whether to retard by one
- 20 minislot to the previous matching minislot or to advance by one minislot to the next matching minislot.

- Referring now also to FIG. 4 there is shown a composite timing diagram illustrating the handling of fault b)
- 25 above, namely that the end of frame reception does not align to a minislot action point. A frame 300 with frame ID m starts at the minislot action point of the first minislot x of dynamic slot m (labelled 310). The end of frame 300 coincides with a minislot boundary 317 which
  - 30 occurs at the end of minislot x+5 (labelled 315) and start of minislot x+6 (labelled 316).

Since the end of reception of a frame may occur in either a matching or mismatching minislot, where a frame ends at a minislot boundary as in the boundary 317 of FIG. 4, it is unclear which one of minislots 315 and 316 is to be treated to be the minislot in which the frame has ended. As will be appreciated for a dynamic segment, this leads to ambiguity over where the next dynamic slot (slot  $m+1$ ) will start.

10

One group of nodes may assume that the frame 300 has ended in minislot 315 ( $x+5$ ), whereupon this group of nodes adopts the timeline 320. According to the timeline 320, since the frame 300 has ended in minislot  $x+5$  (labelled 321 in timeline 320), there will follow empty minislot  $x+6$  (labelled 322) before the next dynamic slot (slot  $m+1$ ) commences at matching minislot  $x+7$  (labelled 323).

20 Another group of nodes may assume that the frame 300 has ended in minislot 316 ( $x+6$ ), whereupon this group of nodes adopts the timeline 330. According to the timeline 330, since the frame 300 has ended in minislot  $x+6$  (labelled 331 in timeline 320), there will follow empty minislot  $x+7$  (labelled 332) before the next dynamic slot (slot  $m+1$ ) commences at matching minislot  $x+8$  (labelled 333).

Despite the possible existence of two timing regimes operating within the nodes, namely one group operating according to the timeline 320 and another group operating

30



according to the timeline 330, there are no collisions or arbitration problems, either intra-group or inter-group.

The two timing regimes 320 and 330 will be resolved  
5 across all nodes when the next frame is transmitted. If  
the node which sends the next frame is operating  
according to the timeline 320, then upon transmission,  
all nodes using the timeline 320 will recognise  
commencement of a frame in a matching slot, and will take  
10 no action. All nodes using the timeline 330 will notice  
commencement of a frame in a mismatching slot and will  
take the appropriate action detailed for fault a) above  
to rectify this problem, whereupon all nodes of the  
system will be resolved to the timeline 320.

15

In a similar way, if the node which sends the next frame  
is operating according to the timeline 330, then upon  
transmission, all nodes using the timeline 330 will take  
no action and all nodes using the timeline 320 will take  
20 the appropriate action detailed for fault a) above,  
whereupon all nodes of the system will be resolved to the  
timeline 330.

It will be understood by a person skilled in the art that  
25 alternative embodiments to those described above are  
possible. For example, the number of slots, minislots and  
macroticks associated with each segment may differ from  
those described above.

30 Furthermore the minislot action points described above  
need not occur at the boundary between the first and

second macroticks of each minislot, but for example they may be arranged to occur between second and third macroticks in a minislot having at least three macroticks.

5

It will be understood that the method for collision free combined static and dynamic media arbitration based on a system wide synchronized time base described above provides the following advantages:

- 10 - provides a closed concept for both static (pre-scheduled) and dynamic (run-time determined) media arbitration,
  - provides a periodically recurring communication pattern,
  - 15 - provides bounded and deterministic communication jitter, and
  - is capable of compensating large oscillator drifts.
-

---

**Claims**

1. A communications system for providing media arbitration via a communications protocol using  
5 consecutive communication slots, the system comprising:  
a plurality of communication nodes, each node arranged  
for communicating frames of data with the other nodes  
during the communication slots, each of the plurality of  
communication nodes including a time base comprising  
10 consecutive timeslots,  
wherein each timeslot comprises at least two macroticks  
and a transmission action point located at a boundary  
between two of the at least two macroticks, such that  
transmission of each frame of data starts and ends at a  
15 transmission action point.
  2. A communication node for use with a multi-node  
distributed communications system utilising a  
communications protocol using consecutive communication  
20 slots, the node arranged for communicating frames of data  
with other nodes of the system during the communication  
slots, the node including:  
a time base comprising consecutive timeslots,  
wherein each timeslot comprises at least two macroticks  
25 and a transmission action point located at a boundary  
between two of the at least two macroticks, such that  
transmission of each frame of data starts and ends at a  
transmission action point.
  - 30 3. A method for providing media arbitration in a multi-  
node distributed communications system via a
-

- 17 -

communications protocol using consecutive communication slots, the method comprising the steps of:  
providing a system wide time base of time slots, each timeslot comprising at least two macroticks and a  
5 transmission action point located at a boundary between two of the at least two macroticks; and,  
each node of the system communicating frames of data with the other nodes during the communication slots,  
wherein the transmission of each frame of data starts and  
10 ends at a transmission action point.

4. The system of claim 1, node of claim 2 or method of claim 3 wherein the communication slots include static communication slots.

15 5. The system, node or method of claim 4 wherein a predetermined number of timeslots are utilised for each static communication slot.

20 6. The system, node or method of any preceding claim wherein the communication slots include dynamic communication slots.

25 7. The system, node or method of claim 6 wherein a dynamically allocated number of timeslots are utilised for each dynamic communication slot.

8. The system, node or method of claim 7 wherein during dynamic communication slots in which no frame  
30 transmission takes place, the number of dynamically allocated number of timeslots is one timeslot.

---

9. The system, node or method of claim 7 or claim 8 wherein each dynamic communication slot in which frame transmission takes place is divided into alternating  
5 matching and mismatching time slots, the matching time slots being valid transmission slots.

10. A system for media arbitration substantially as hereinbefore described with reference to the accompanying  
10 drawings.

11. A node for media arbitration substantially as hereinbefore described with reference to the accompanying  
15 drawings.


12. A method for media arbitration substantially as hereinbefore described with reference to the accompanying  
20 drawings.

**Abstract**SYSTEM, NODE AND METHOD FOR PROVIDING MEDIA ARBITRATION


5 (with reference to FIG. 1)

A multi-node communications system is provided with communications protocol using both static (11, 12, 13, 18) (pre-determined) and dynamic (51, 52, 53...) (run-time  
10 determined) consecutive communication slots is used. The system has a number of distributed communication nodes, each node being arranged for communicating frames of data with the other nodes during both the static (11, 12, 13...) and the dynamic (51, 52, 53...) communication slots. Each  
15 node includes a synchronised time base 5 made up of consecutive timeslots (11, 12, 13..., 51, 52, 53...). The timebase 5 has substantially the same error tolerance in each node. For static communication (10), a predetermined number of timeslots (20) are utilised for each static  
20 communication slot. For dynamic communication a dynamically allocated number of timeslots (60) are utilised for each dynamic communication slot. In this way both static and dynamic media arbitration is provided within a periodically recurring communication pattern.  
25 Communication jitter is well defined and dealt with, and large oscillator drifts are compensated for.


---

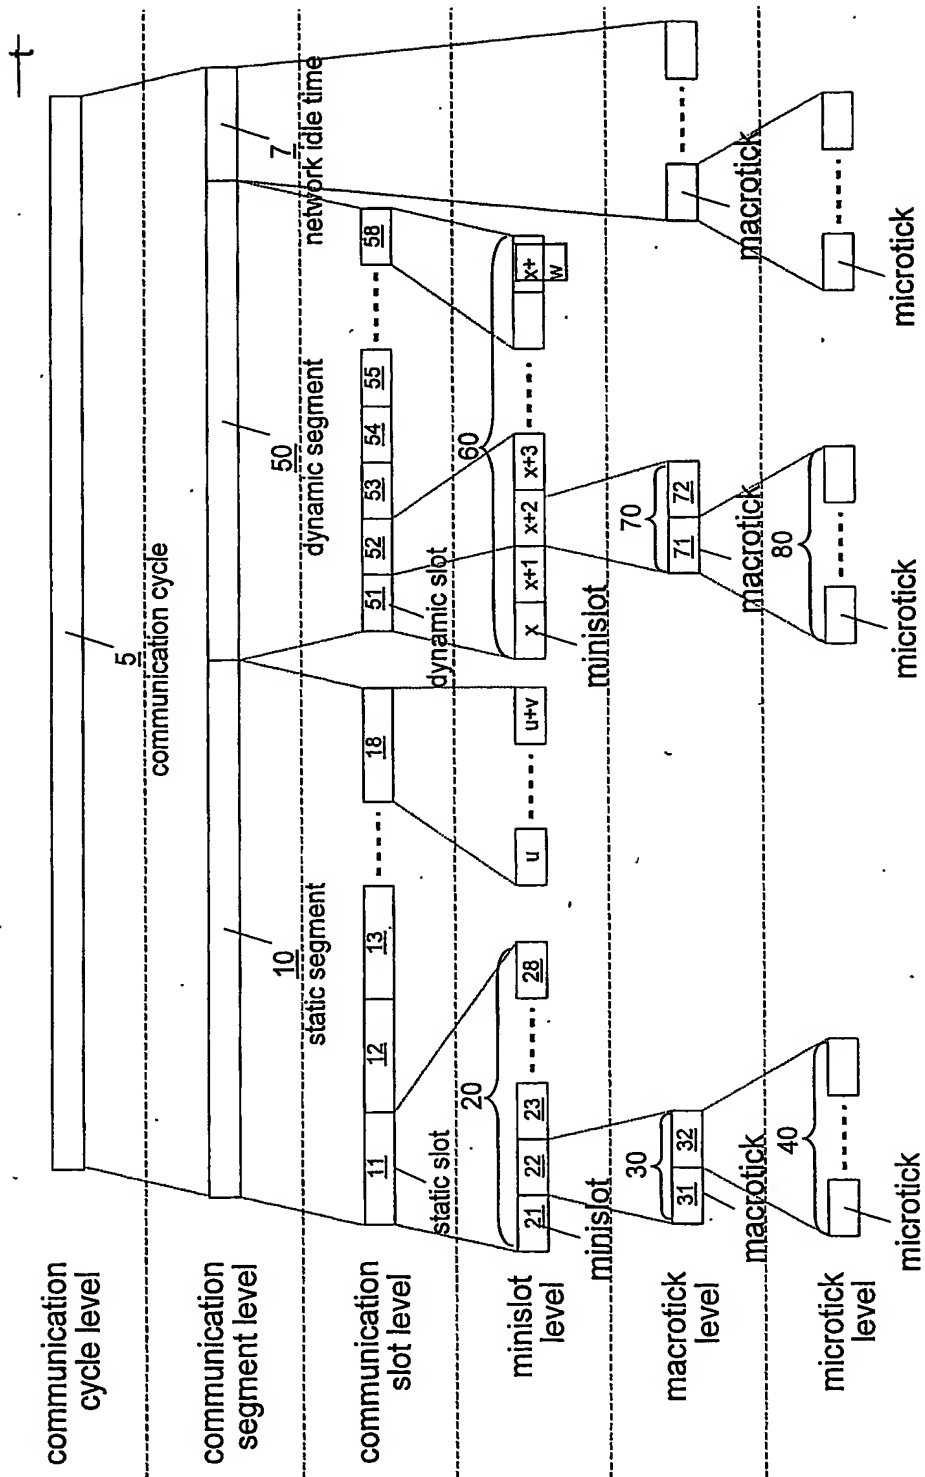


2/4

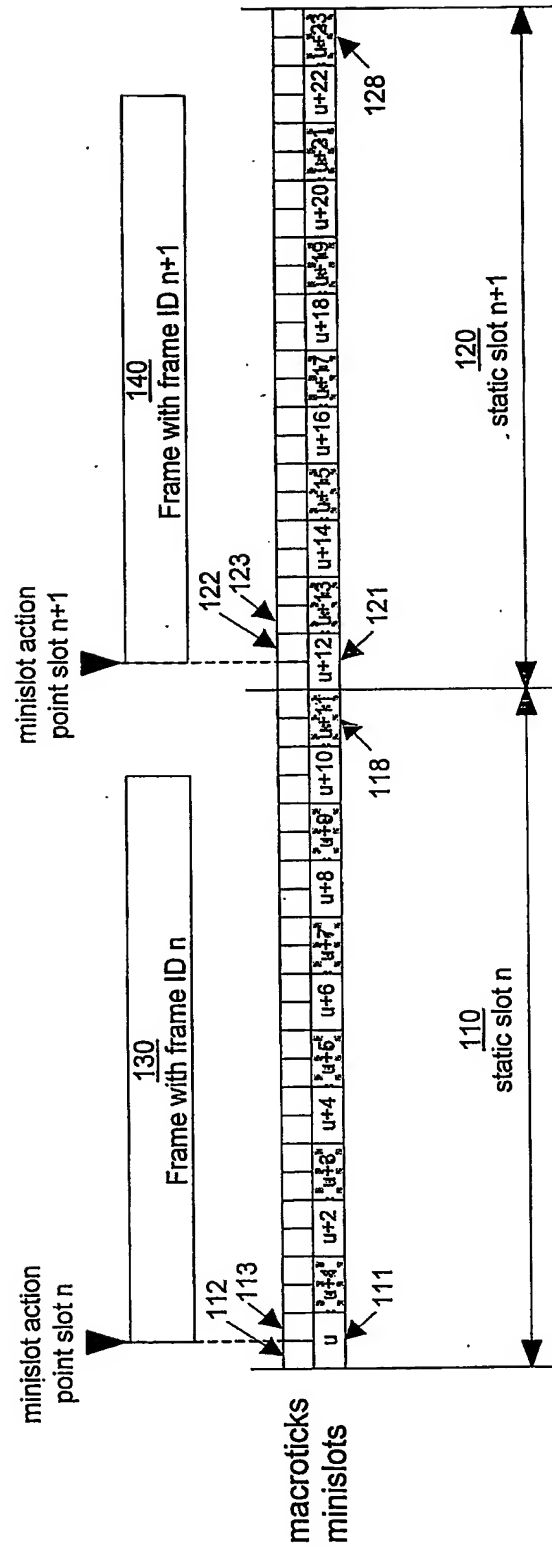



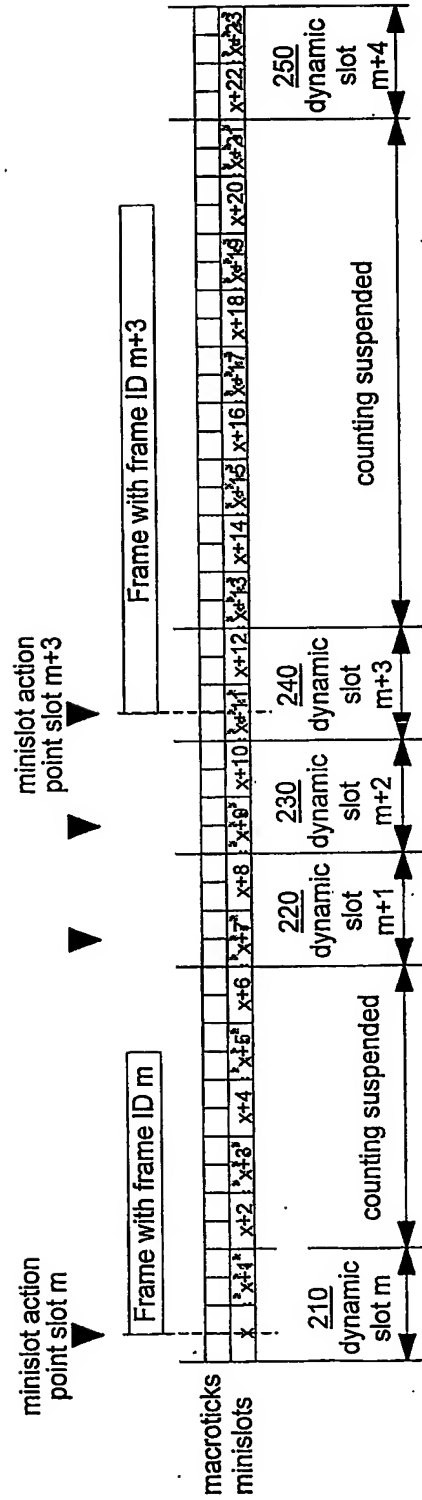

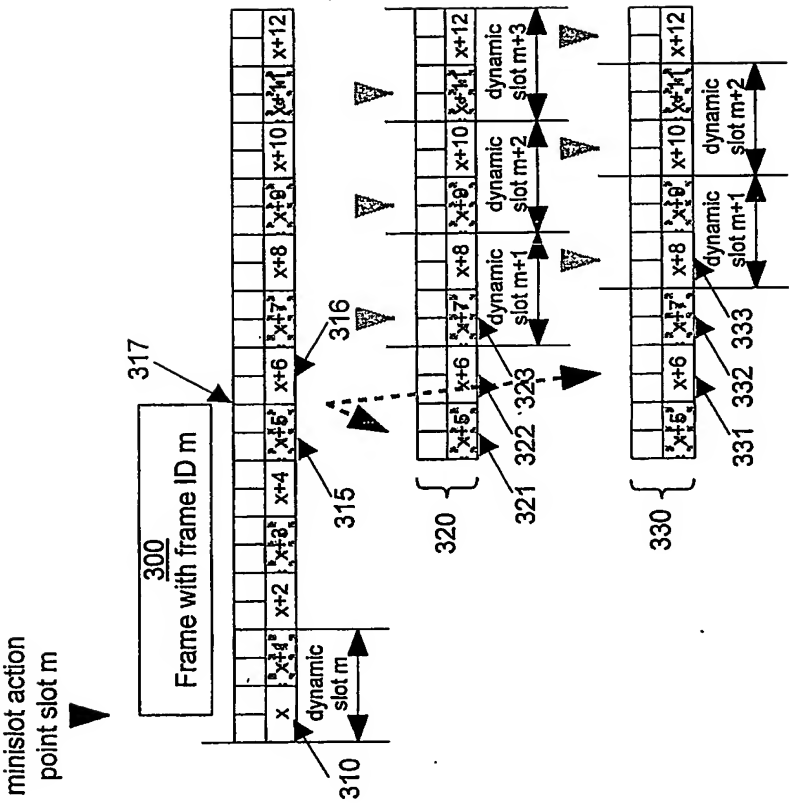

PCT Application  
**PCT/EP2003/050868**

